

## ZIGBEE 6W/9W/12W LED Downlight Dual White And Color



6W



9W



12W

### Features:



Soft start,high safety



Power off memory



Easy Installation



Compatible gateways for Zigbee light link(ZLL)




16 million colors changing




Two years warranty,CE,RoHS

## DIMENSIONS:

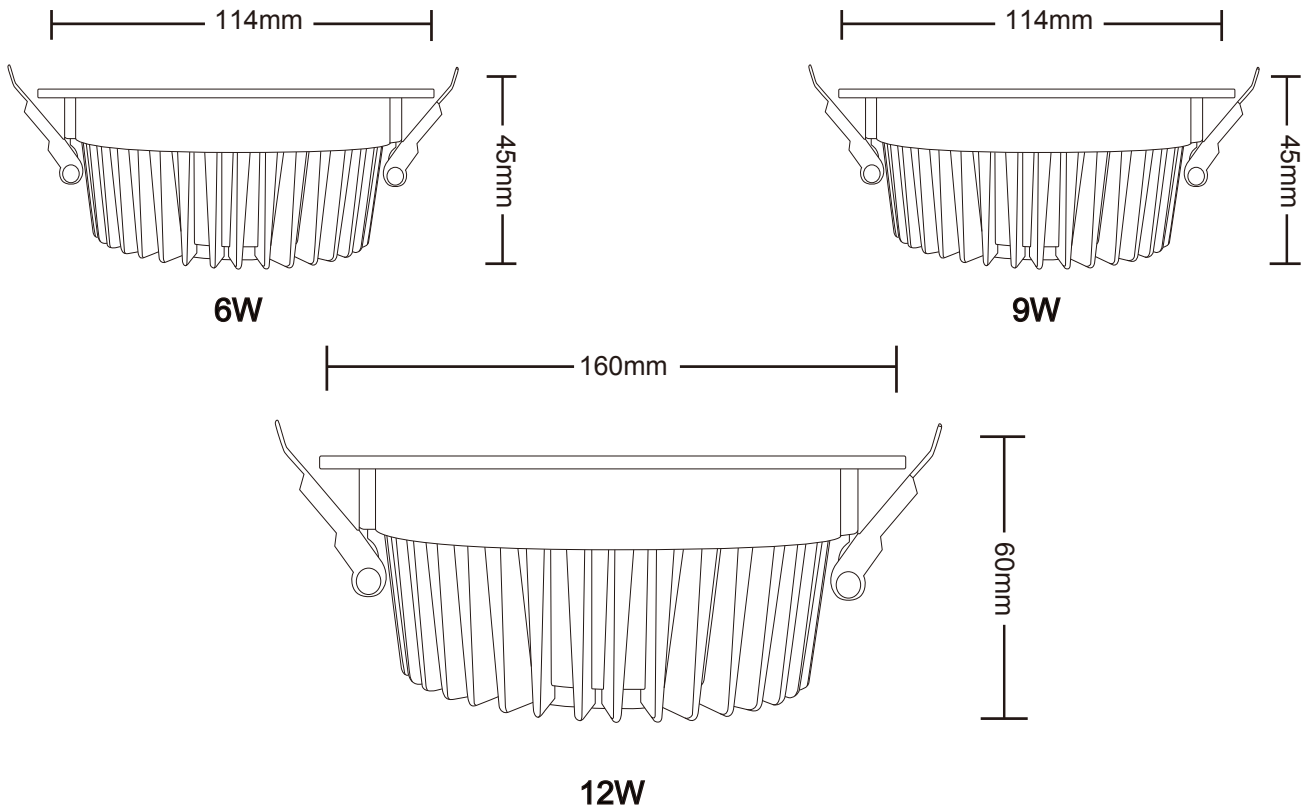

## Specifications:

- **Size:**  $\Phi 114 \times 45\text{mm}$  (6W/9W) ,  $\Phi 160 \times 60\text{mm}$  (12W)
- **Power Rating:** 6W/9W/12W
- **Input voltage:** AC100~240V
- **Color temperature:** 2700~6500K
- **Luminous Flux:** 500~550LM(6W) , 800~850LM(9W), 1000~1050LM(12W)
- **Working Temp:**  $-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- **Beam angle:**  $120^{\circ}$
- **Lifetime:** 50000hours
- **CRI:** >80
- **N.W.:** 0.3kg(6W/9W) , 0.52kg(12W)
- **G.W.:** 0.34kg(6W/9W) , 0.6kg(12W)
- **Housings:** Aluminum+PC Cover
- **LED Quantity:** 1.5W RGB SMD5050 4pcs 0.5W SMD 3030 20pcs (6W)  
1.5W RGB SMD5050 4pcs 1W SMD 3030 20pcs (9W)  
1.5W RGB SMD5050 4pcs 1W SMD 3030 24pcs (12W)
- **Function:** functional white light, all shades of white, from warm to cold white color, dimmable via smart device only

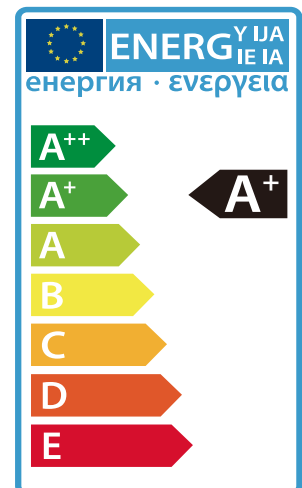

### Installation:


1. Turn off the Power.
2. Plug in the bulb.
3. Now you can connect it with the gateway.

### Connection with Gateway:


1. Start the device searching on the ZigBee Light Link Gateway, it could take some time. If the Gateway does not find the device, switch off/on the gateway and try again or make a reset.
2. Switch on the bulb, please switch off/on the bulb 2-3 times while searching.
3. The Gateway found your device and you can assign it to the different rooms/zones/groups.
4. Now you can use the device.

### Reset:

1. Switch on your device.
2. Now switch off and on within 2 seconds.
3. Repeat off/on four times.
4. Reset is done when the device is switched on in the fifth time and the light stays on after blinking 4 times.

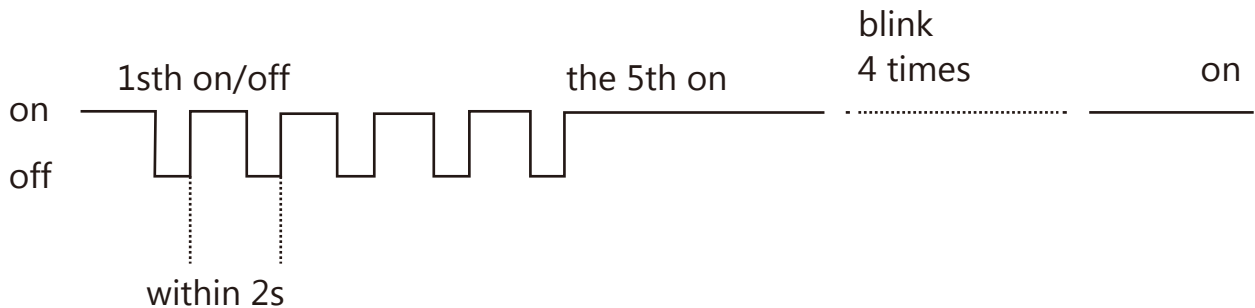

### Auto-transfer

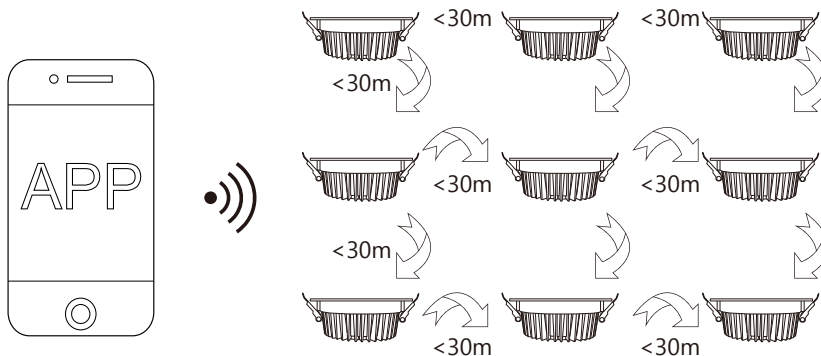


### Auto-transfer


**Application:**




**Package information:**

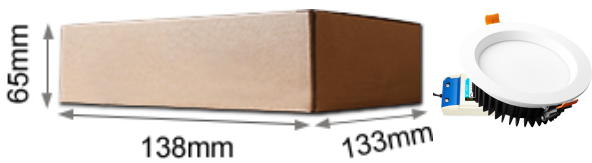


Qty:6W/9W LED Downlight 1pcs  
 Size:65×133×138mm  
 G.W.:0.34Kg

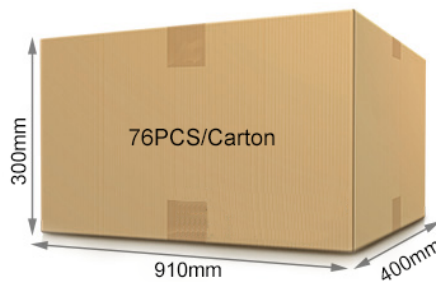

Qty:76 pcs/carton  
 Size:910x400x300mm  
 G.W.:30Kg  
 (6W/9W)

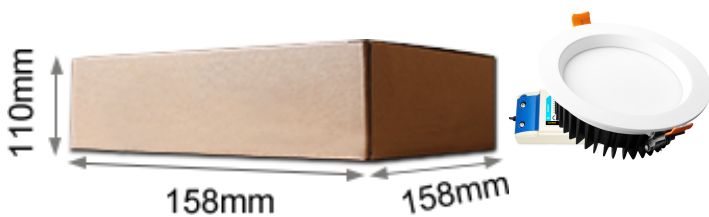

Qty:12W LED Downlight 1pcs  
 Size:110×158×158mm  
 G.W.:0.6Kg

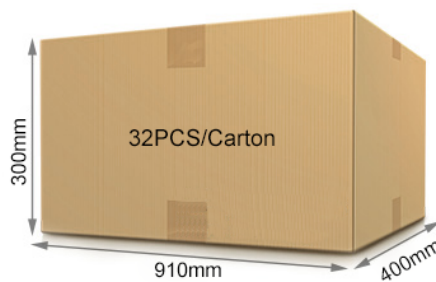

Qty:32 pcs/carton  
 Size:910x400x300mm  
 G.W.:23.5Kg  
 (12W)